



Leading Tecnology


**VERTICAL
MIXER**

MX1450R



www.akronag.com

- **Transmission:** Cardan shaft (Optional feature: Constant velocity driveline).
- **Safety:** Cardan shaft with torque limiting overload protection.
- **Screw Speed:** direct drive: 35 RPM. Optional feature: 2 speed gearbox for low power tractors (18RPM).
- **Shredding/Mixing Screw:** Vertical auger with tungsten carbide coated knives.
- **Strong chassis.**
- **Extra hardened tub:** 5/8" steel floor plate (15.8 mm). 1/4" steel side plates (6.35mm) with lap joints.
- **Counter Knife:** Adjustable - 3 positions.
- **Hydraulically operated right-side discharge PVC belt conveyor.**
- **Electronic scale.**
- **Material to be processed:** Hay bale and all type of ingredients typically used for animal feed.
- **Shred time:** From 6 to 8 min.
- **Mix Time:** From 4 to 5 min.
- **Tractor PTO:** 540 RPM.

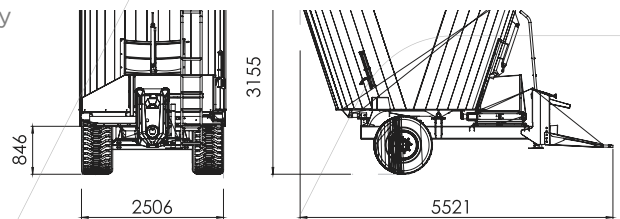

TECHNICAL SPECIFICATIONS

High shredding capacity
Low power requirement
Efficient and uniform feed mix.

Capacity (m ³)	14
Maximum Load (Kg)	7,000
Curb Weight (Kg)	4,200

MX1450R



Rosario de Santa Fe 2256
X2400EFN San Francisco CBA, Argentina
Tel/Fax: + 54 3564 498502
export@akron.com.ar
www.akronag.com

AKRON may change specifications and product designs in this or other brochure at any time, without previous notice. Pictures shown are for illustration purposes only.



Hydraulically operated right-side discharge PVC belt conveyor.



Belt conveyor speed adjustment.



Auger with tungsten carbide coated knives.



Load cells (3).