



Leading Tecnology

Forage Compression Trailers

CC4150

CC3945

CC3840

CC2735



www.akron.com.ar



CC4150 - CC3945 - CC3840 - CC2735



Hydraulic push-off and compression system: enables to transport an additional 40% of material.

- **Heavy-duty machine. Strong hot-dip galvanized surfaces that prevent long-term corrosion.**
- **Depending on the model, the boxes can be mounted on an AKRON trailer, truck or semitrailer.**
- **7" digital tractor cab display** (touchscreen).
- **Parabolic spring suspension** that offers serenity and stability over all terrains.
- **Hydraulically operated rear gate by means of a double-acting cylinder.**
- **Inductive sensors: steering axles and rear gate open/close task.**
- **Rear discharge pan. Discharge deflectors.**
- **Swivel Hitch.**
- **Running gear:** Tandem: one fixed axle and one steering axle/ tridem: one fixed axle and two steering axles. Both include lock system.
- **Hydraulic brake system** (optional).
- **Fixed 2000 mm side panels** (left and right).
- **500 mm fold-down side panel** (right or left side depending on preference) (optional).
- **Mandatory led lights. Galvanized mudguards.**
- **Other optional features:**

Scale/ Rear bumper/ 2 cameras: upper and backup/ 300-mm extended panel (right or left side depending on preference).

ES1512 Spreader Module (Optional)

Thanks to this device the forage compression trailer can be used for organic fertilization tasks. The user can have a multi-purpose tool ready to be used for different tasks at different times of the year.



7" DIGITAL TRACTOR CAB DISPLAY (touchscreen)


	CC4150F	CC3945	CC3840	CC2735
Maximum Load Capacity (Tonne):	29	29	29	20
Non-compressed cargo volume (m ³):	50	45	40	35
Compression Capacity: up to an additional 40% of material (depending on moisture and condition).				
Power Requirement (HP) (depending on the model)	200	180+	160+	140+
Number of Axles:	3	3	3	2
Minimum hydraulic volume required (L)	70	70	65	60
Minimum pressure requirement (bar)	160			



Rosario de Santa Fe 2256
X2400EFN San Francisco CBA, Argentina
Tel/Fax: + 54 3564 498502
export@akron.com.ar

www.akron.com.ar


AKRON may change specifications and product designs in this or other brochure at any time, without previous notice. Pictures shown are for illustration purposes only.

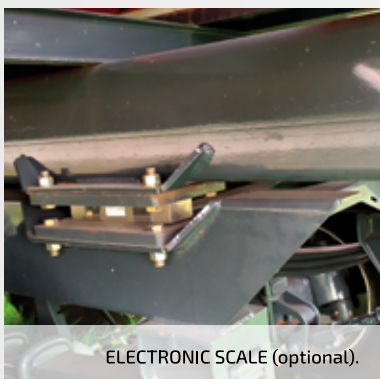

ELECTRONIC SCALE (optional).



SLIDING FLOOR.

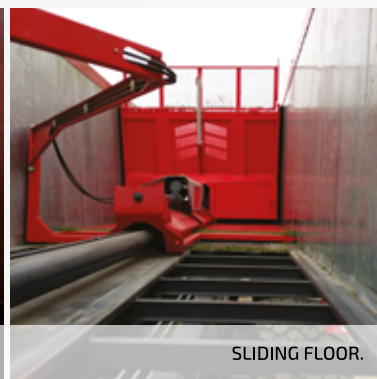

REAR DISCHARGE PAN.

